


64CH Tribrid NDVR

For IP, Analog and HD SDI Camera

H.264 64CH D1 Real-time Recording

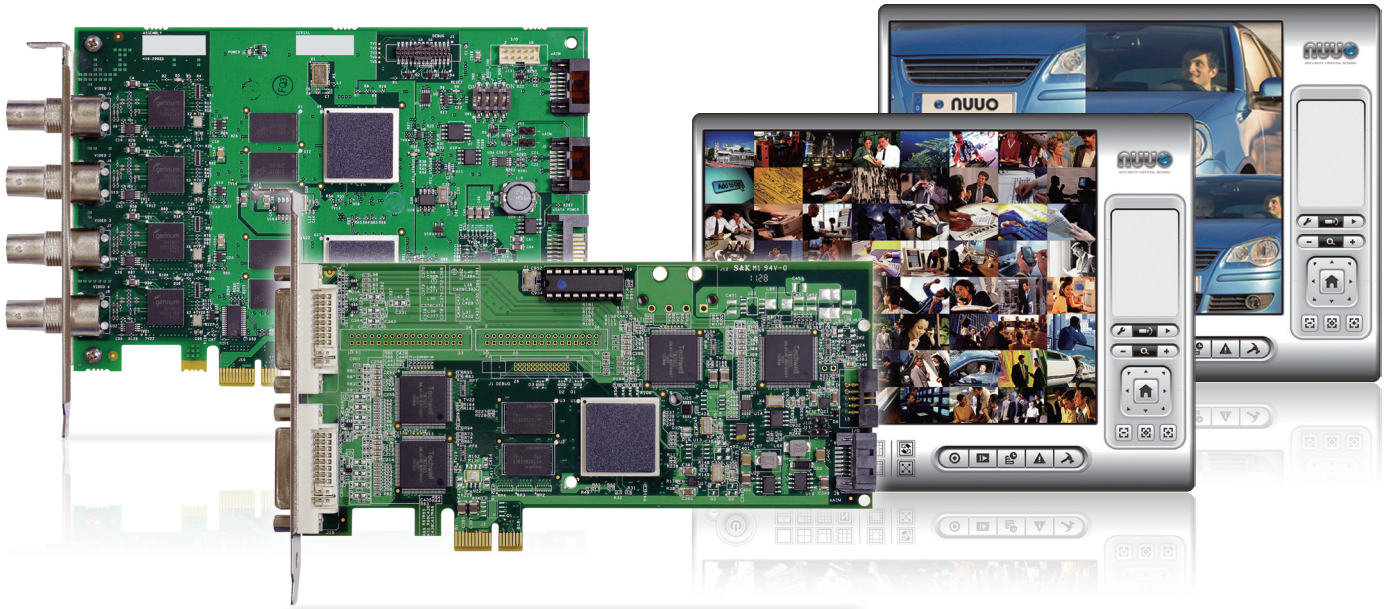

- Stackable Up to 64 Channels
- Supported by NUUO CMS
- Support iPhone
- Support Instant Playback
- PCI/PCI-Express Interface
- Support POS
- Up to 128 CH Remote Live View
- Support 30 language
- Support Transcode
- Support Triple Monitors

Camera Support

Support 52 Camera Brands and over 1090 Models




Solution Partner





* The maximum number of camera connections depends on the server's hardware configuration and the total bit rate of the IP cameras. Please check NUUO Calculator on <http://support.nuuo.com/calculator/>




HD SDI H.264 Hardware Compression Capture Card SCB 8000 Series

Product Name	SCB-8004HD
Video Inputs	4
Max Cards Installation	2 (can be with 6000S/7000S series for more channels)
Display Rate	120fps @ 1080p
Recording Rate	120fps @ 1080p
Video Resolution	1080p, 720p
Dimension	178x126
Product Image	




H.264 Hardware Compression Capture Card SCB 7100 Series

Product Name	SCB-7108	SCB-7116
Video Inputs	8	16
Audio Inputs	8	16
Max. Cards Installation	1 (can be with 6000/6000S/7000/7000S series for more channels)	
Display Rate (NTSC/PAL)	240fps / 200fps	480fps / 400fps
Recording Rate [D1] (NTSC/PAL)	240fps / 200fps @ D1 resolution	480fps / 400fps @ D1 resolution
TV Output Rate	25fps (only RCA), 14fps (only Digital Port), 10fps (RCA & Digital Port)	
TV Output	RCA connector x2, Digital Port connector x1	
Video Resolution	NTSC : 176 x120, 352 x 240, 704 x 480, PAL : 176 x 144, 352 x 288, 704 x 576	
Dimensions (W x H mm)	216 x 126	
Product Image		

H.264 Hardware Compression Capture Card SCB 7000S Series

Product Name	SCB-7004S	SCB-7008S	SCB-7016S
Video Inputs	4	8	16
Audio Inputs	4	8	16
Max. Cards Installation	4	4	4
Display Rate (NTSC/PAL)	120fps / 100fps	240fps / 200fps	480fps / 400fps
Recording Rate [D1] (NTSC/PAL)	120fps / 100fps @ D1 resolution	240fps / 200fps @ D1 resolution	480fps / 400fps @ D1 resolution
Video Resolution	NTSC : 176 x120, 352 x 240, 704 x 480, PAL : 176 x 144, 352 x 288, 704 x 576		
Dimensions (W x H mm)	188 x 121		
Product Image			

H.264 Hardware Compression Capture Card SCB 6000S Series

Product Name	SCB-6004S	SCB-6008S	SCB-6016S
Video Inputs	4	8	16
Audio Inputs	4	8	16
Max. Cards Installation	4	4	4
Display Rate (NTSC/PAL)	120fps / 100fps	240fps / 200fps	480fps / 400fps
Recording Rate [CIF] (NTSC/PAL)	120fps / 100fps	240fps / 200fps	480fps / 400fps
Recording Rate [D1] (NTSC/PAL)	30fps / 25fps @ D1 resolution	60fps / 50fps @ D1 resolution	120fps / 100fps @ D1 resolution
Video Resolution	NTSC : 176 x120, 352 x 240, 704 x 480, PAL: 176 x 144, 352 x 288, 704 x 576		
Dimensions (W x H mm)	188 x 121		
Product Image			

H.264 & MPEG4 Software Compression Capture Card SCB 3000 / 1000 Series

Product Name	SCB-3004	SCB-3008	SCB-3016	SCB-1004	SCB-1008
Video Inputs	4	8	16	4	8
Audio Inputs	4	4	4	1	1
Max. Cards Installation	2	2	2	4	4
Display Rate (NTSC/PAL)	120fps / 100fps			30fps / 25fps	
Recording Rate [CIF] (NTSC/PAL)	120fps / 100fps			30fps / 25fps	
Video Resolution	NTSC : 352 x 240, 640 x 480, 704 x 480, PAL : 352 x 288, 640 x 576, 704 x 576				
Dimensions (W x H mm)	200 x 120			155 x 120	
Product Image	